


Zebra Printer USB Driver Setup Instructions

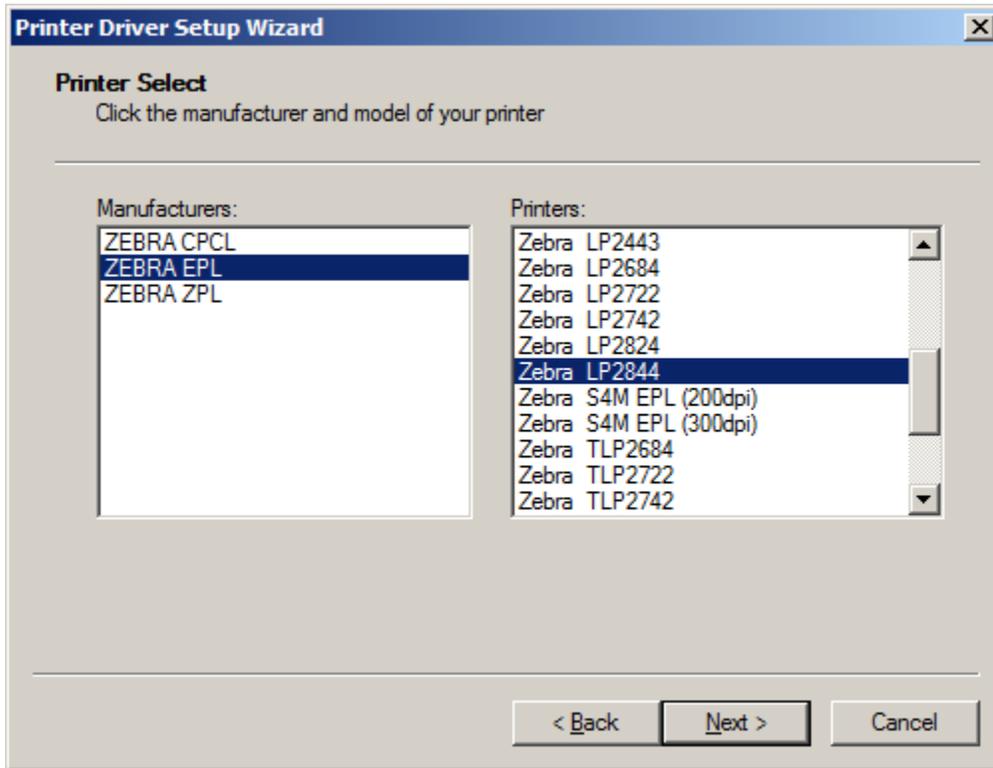

Make sure you pick a COM port that is not used by another device (this can be changed later in the Device Manager)...


COM port values:

Baud Rate: 9600


Data: 8 bits

Parity: None


Stop: 1 bit

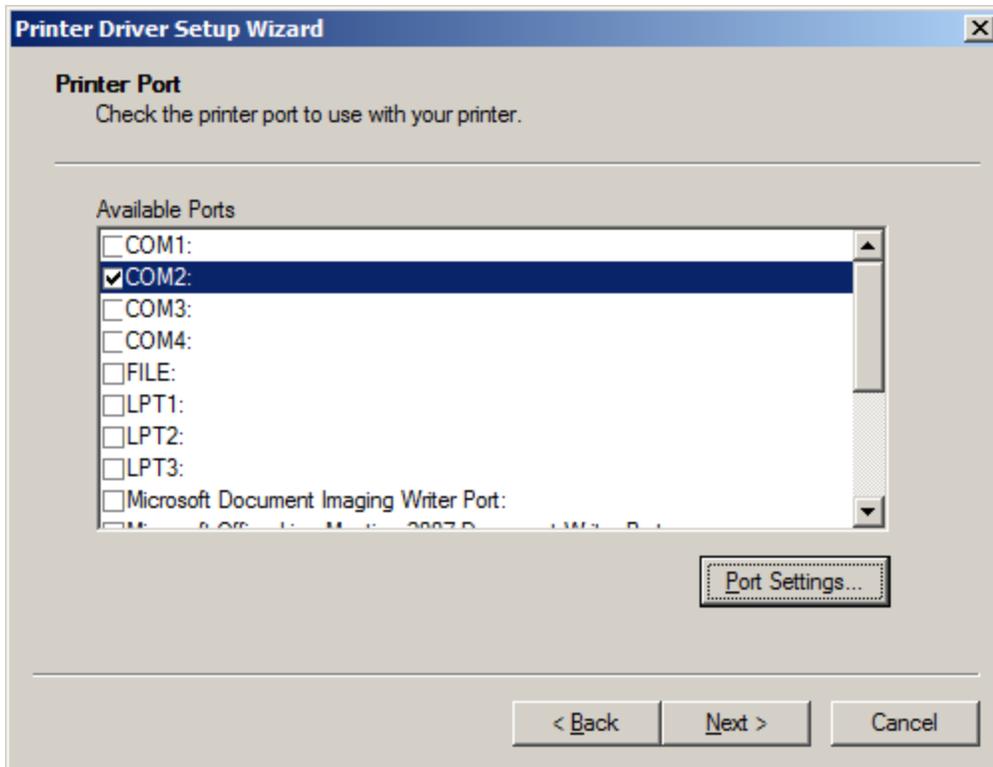


I think 3x2 inches is the label size..

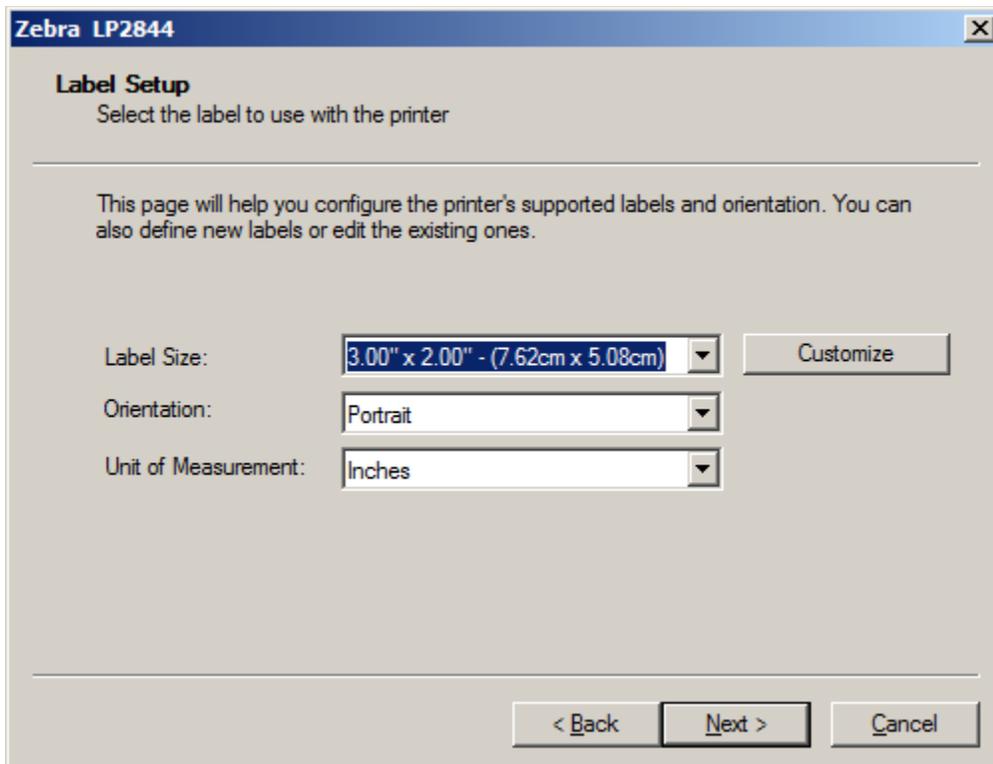

Once finished, login to Truck Tracker and go to File-Settings-Parts Inventory, and click the Configure Barcode Printer button.

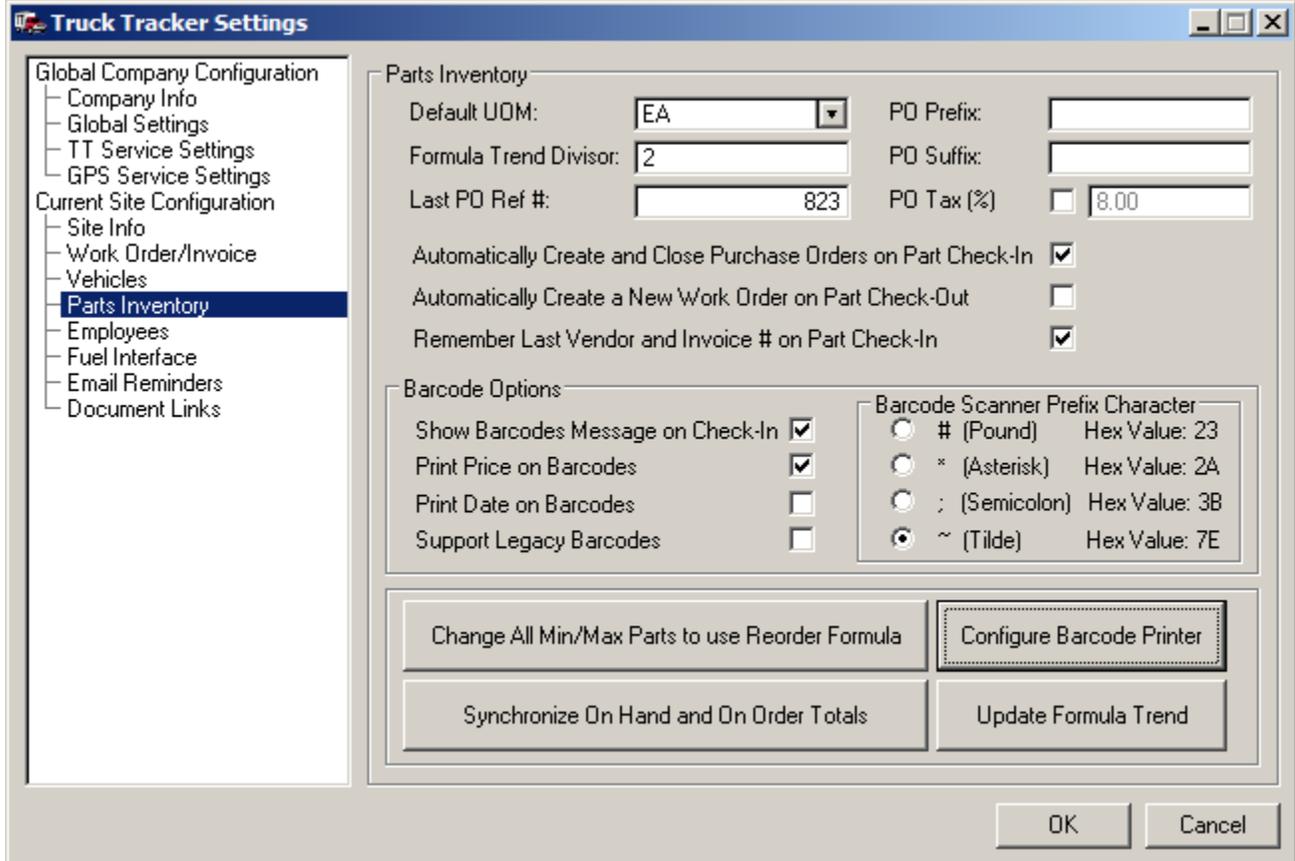

Choose the Zebra option and the COM port you chose in the printer driver. You must first press "Initialize Barcode Labels" button before barcodes can be printed from Truck Tracker.

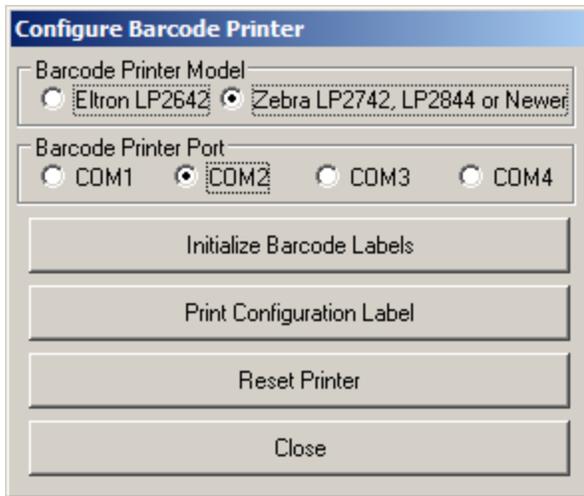

If you get an error message, restart the printer and try again. Press Print Configuration Label to test the communication with the printer. If nothing happens you might need to restart your computer and/or printer, check the COM port settings and try again.